TECHNICAL DATA SHEET DIVERSITECH



June 2019

T14 Series Transformers

Product

T14 Series Transformers, Class 2, UL 1585 Recognized

Description

These transformers provide the power source for heating, air conditioning, or refrigeration systems. They are multi-mounted with wire connection secondary.

Application

HVAC power source

Purpose


RPC clips are designed to fasten and secure tubing, pipes, conduits and cables onto standard size strut channels and threaded rods.

Features

- Cost effective
- Easy to install
- UL 1585 Recognized

Specifications

Primary Voltage	120 VAC 120/208/240 VAC	
Secondary Voltage	24 VAC	
VA	40 VA	
Lead Wire	18 AWG, 9.8 in	
Operating Temperature	23°F - 86°F -5°C - 30°C	
Mounting	Multi-foot Mounting	
Certifications	UL 1585 Recognized	
Warranty	1 year	

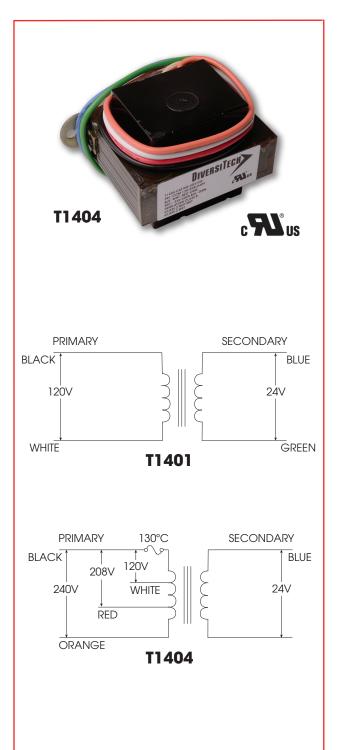

ITEM #	VA	PRIMARY VOLT. (VAC)	SECONDARY VOLT. (VAC)	DIMENSIONS (IN)	WEIGHT (LBS)	MOUNTING
T1401	40	120	24	H = 4.0, W = 2.5, D = 2.5	1.49	Foot
T1404	40	120/208/240	24	H = 2.5, W = 2.5, D = 3.75	1.5	Foot