

Braided Vinyl Tubing

July 2018



Product

Braided Vinyl Tubing

Advantages

Applications include: air conditioning and refrigeration condensate drains, condensate pump discharge lines and humidifier overflows.

- Several sizes from 1/4" to 3/4" diameter
- Available in 50ft or 100ft length
- Non-toxic clear vinyl chloride
- Maximum service temperature 140° F (60° C)
- Extra rigid design resists crimping and kinking due to durometer value of 78-80 (shore A)

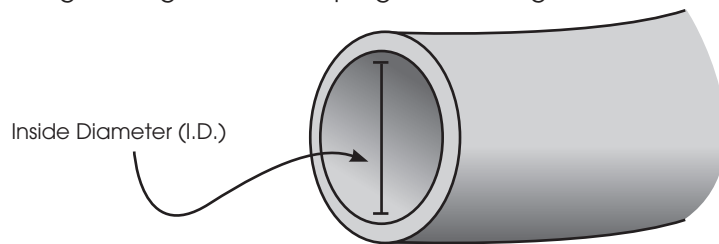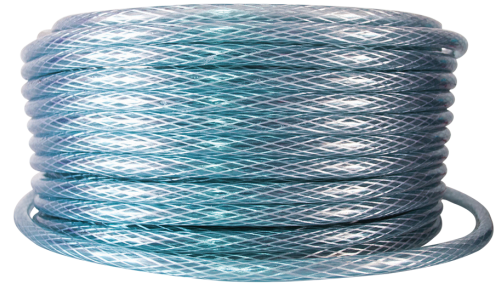

- Reinforced polyester caliber 300-500
- Hardness: 78-80 Shore A
- Recommended working temp 41°F - 140°F

| ITEM # | DESCRIPTION | ORDER MULTIPLE | LIST PRICE |
|---------|---------------------------------------------------------|----------------|------------|
| 7-14B | 1/4", .250" I.D.. 100ft Braided Reinforced Vinyl Tubing | 1 | \$36.12 |
| 7-14B50 | 1/4", .250" I.D.. 50ft Braided Reinforced Vinyl Tubing | 1 | \$23.48 |
| 7-38B | 3/8", .375" I.D.. 100ft Braided Reinforced Vinyl Tubing | 1 | \$39.60 |
| 7-38B50 | 3/8", .375" I.D.. 50ft Braided Reinforced Vinyl Tubing | 1 | \$25.78 |
| 7-12B | 1/2", .500" I.D.. 100ft Braided Reinforced Vinyl Tubing | 1 | \$58.56 |
| 7-12B50 | 1/2", .500" I.D.. 50ft Braided Reinforced Vinyl Tubing | 1 | \$38.06 |
| 7-58B | 5/8", .625" I.D.. 100ft Braided Reinforced Vinyl Tubing | 1 | \$64.92 |
| 7-58B50 | 5/8", .625" I.D.. 50ft Braided Reinforced Vinyl Tubing | 1 | \$42.20 |
| 7-34B | 3/4", .750" I.D.. 100ft Braided Reinforced Vinyl Tubing | 1 | \$90.24 |
| 7-34B50 | 3/4", .750" I.D.. 50ft Braided Reinforced Vinyl Tubing | 1 | \$58.66 |

| DT PART# | I.D. | I.D. Tolerance | I.D. Max | I.D. Min | Length (ft) | Roll Weight (Lbs) | Working Pressure (PSIG) | Temperature (°F) |
|----------|-------|----------------|----------|----------|-------------|-------------------|-------------------------|------------------|
| 7-14B | 0.250 | 0.0080 | 0.258 | 0.242 | 100 | 5.04 | 206 | 140 |
| 7-14B50 | 0.250 | 0.0080 | 0.258 | 0.242 | 50 | 2.52 | 206 | 140 |
| 7-38B | 0.375 | 0.0150 | 0.390 | 0.360 | 100 | 7.17 | 183 | 140 |
| 7-38B50 | 0.375 | 0.0150 | 0.390 | 0.360 | 50 | 3.59 | 183 | 140 |
| 7-12B | 0.500 | 0.0250 | 0.525 | 0.475 | 100 | 8.07 | 135 | 140 |
| 7-12B50 | 0.500 | 0.0250 | 0.525 | 0.475 | 50 | 4.04 | 135 | 140 |
| 7-58B | 0.625 | 0.0300 | 0.655 | 0.595 | 100 | 12.60 | 110 | 140 |
| 7-58B50 | 0.625 | 0.0300 | 0.655 | 0.595 | 50 | 6.30 | 110 | 140 |
| 7-34B | 0.750 | 0.0350 | 0.785 | 0.715 | 100 | 17.13 | 100 | 140 |
| 7-34B50 | 0.750 | 0.0350 | 0.785 | 0.715 | 50 | 8.57 | 100 | 140 |